

EP2MRHSS


PUNZONI A TESTA CILINDRICA FORATI CON
ESTRATTORE A MOLLA FORMA C ISO 8020



MAT : Acciaio super rapido

GAMBO : 62 ÷ 64 HRC

TESTA : 45 ± 5 HRC

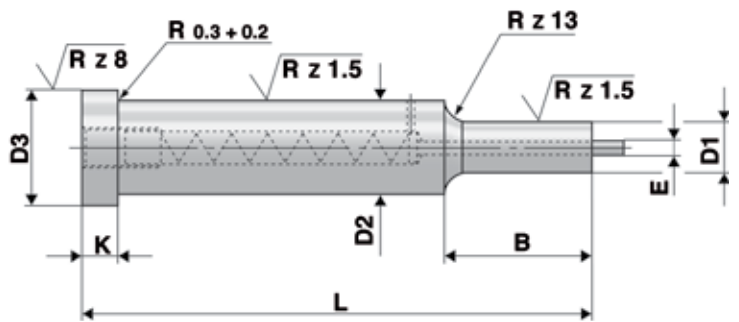

Nell'ordine specificare il valore di **D1**, **D2** e **L** es: **EP2MRHSS 15 20 063**

D2 m5	D3 0 / -0.15	D1 0 / +0.01	K +0.1 / +0.2	E	B Standard	B Max	L
6	9	2.5 - 2.9	5	1	13	25	063 / 071 / 080 / 100
8	11	3 - 7.9	5	1	14	32	063 / 071 / 080 / 100
10	13	4 - 9.9	5	1.4	16	32	063 / 071 / 080 / 100
13	16	5 - 12.9	5	1.4	21	32	063 / 071 / 080 / 100
16	19	8 - 15.9	5	2.1	24	32	063 / 071 / 080 / 100
20	23	12 - 19.9	5	2.1	27	32	063 / 071 / 080 / 100
25	28	17 - 24.9	5	2.1	32	32	063 / 071 / 080 / 100