


## TD-LD


TAPPO DEFLETTORE A LAMA DRITTA



MAT : Ottone OT 58 UNI 5705-65

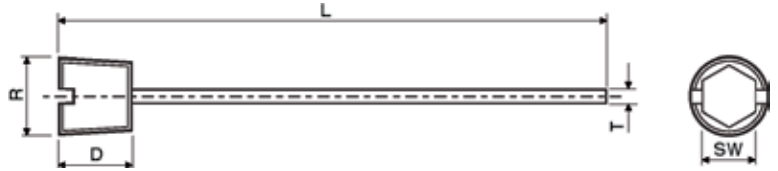

## MODALITA D'USO

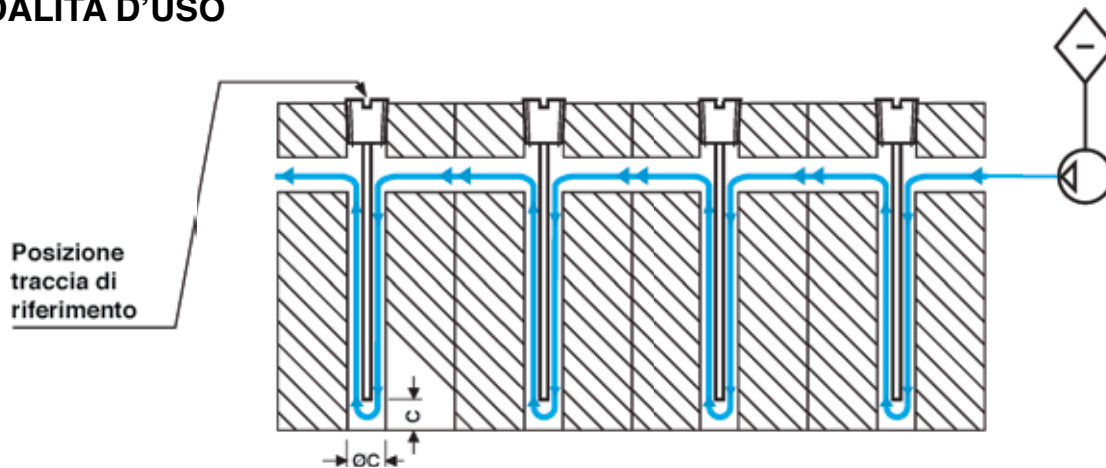

Codice	L	C	ØC	D	SW	R	T
TD-LD116100	104	6.5	6.5	8	4	1/16 GAS	1.6
TD-LD116200	204	6.5	6.5	8	4	1/16 GAS	1.6
TD-LD18100	104	8.5	8.5	8	5	1/8 GAS	1.6
TD-LD18200	204	8.5	8.5	8	5	1/8 GAS	1.6
TD-LD14125	131	11.5	11.5	10	7	1/4 GAS	2.4
TD-LD14250	258	11.5	11.5	10	7	1/4 GAS	2.4
TD-LD38150	156	15	15	10	8	3/8 GAS	2.4
TD-LD38300	309	15	15	10	8	3/8 GAS	2.4
TD-LD12200	207	18.5	18.5	10	10	1/2 GAS	2.4
TD-LD12400	410	18.5	18.5	10	10	1/2 GAS	2.4
TD-LD34300	309	23.5	23.5	12	12	3/4 GAS	3.2
TD-LD34500	512	23.5	23.5	12	12	3/4 GAS	3.2
TD-LD1400	410	28.5	28.5	12	17	1 GAS	3.2
TD-LD1600	614	28.5	28.5	12	17	1 GAS	3.2

I tappi con deflettore a lama dritta intercettano il flusso del fluido di condizionamento stampo convogliandolo alla profondità voluta, nonche farlo proseguire agli altri punti di raffreddamento.