


TD-LS


TAPPO DEFLETTORE A LAMA SPIRALE



MAT : Ottone OT 58 UNI 5705-65

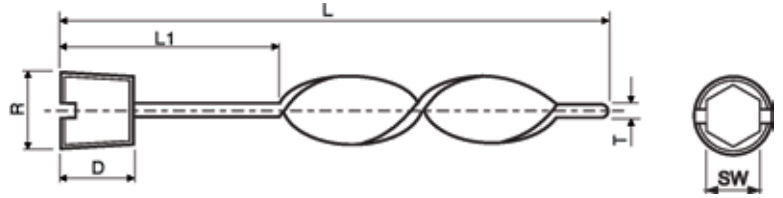

MODALITA D'USO

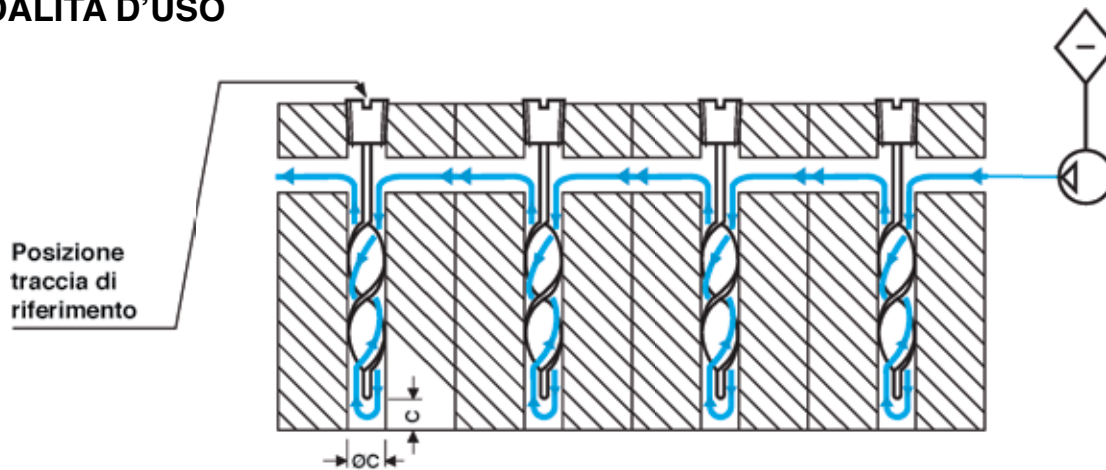

Codice	L	L1	C	ØC	D	SW	R	T
TD-LS18100	101	51	8.5	8.5	8	5	1/8 GAS	1.6
TD-LS18200	203	102	8.5	8.5	8	5	1/8 GAS	1.6
TD-LS14125	127	51	11.5	11.5	10	7	1/4 GAS	2.4
TD-LS14250	254	102	11.5	11.5	10	7	1/4 GAS	2.4
TD-LS48150	152	51	15	15	10	8	3/8 GAS	2.4
TD-LS38300	305	102	15	15	10	8	3/8 GAS	2.4
TD-LS12200	203	76	18.5	18.5	10	10	1/2 GAS	2.4
TD-LS12400	406	127	18.5	18.5	10	10	1/2 GAS	2.4

I tappi con deflettore a [lama spiralata](#) intercettano il flusso del fluido di condizionamento stampo convogliandolo alla profondità voluta e generandosi un moto vorticoso dello stesso aumenta la dispersione del calore.